



BLU 60 mm


DESCRIPTION: Slab **TEXTURE:** Slate and HD² Slate

Pallet Overview 1 B A

	N/S	HD² Slate*** Slate	Chestnut Brown
		Slate	Sandlewood
Same of the same o	100	HD ² Slate*** Slate	Champlain Grey
		HD ² Slate*** Slate	Shale Grey

Specifications per pallet ¹		Imperial	Metric
	Product dimension (L×W×H)	6 ½ × 13 × 2 ¾	165 × 330 × 60
	Product dimension (L×W×H)	13 × 13 × 2 %	330 × 330 × 60
44 units / pallet	Product dimension (L×W×H)	19 ½ × 13 × 2 ¾	495 × 330 × 60
	Cubing	116.82 ft ²	10.96 m ²
44 units / pallet 22 units / pallet	Approx. Weight slate	3 148 lbs	1 428 kg
	Approx. Weight HD ² Slate	3 268 lbs	1 482 kg
	Number of rows	11	
	Coverage per row	10.62 ft ²	0.99 m ²
	Lin. coverage per row	9.81 lin. ft	3.02 lin. m
pecifications per pallet ² (Only Available in Eastern USA)		Imperial	Metric
44 units / pallet	Product dimension (L×W×H)	6 ½ × 13 × 2 ¾	165 × 330 × 60
	Product dimension (L×W×H)	13 × 13 × 2 %	330 × 330 × 60
	Design of the second second	19½×13×2¾	495 × 330 × 60
44 units / pallet	Product dimension (L×W×H)	1972 × 13 × 2 78	100 / 000 / 00
	Cubing	135.39 ft ²	12.58 m ²
44 units / pallet	Cubing	135.39 ft²	12.58 m²
44 units / pallet	Cubing Approx. Weight HD ² Slate	135.39 ft ² 3 779 lbs	12.58 m²
	Cubing Approx. Weight HD² Slate Number of rows	135.39 ft ² 3 779 lbs	12.58 m ² 1 714 kg

MECHANICAL INSTALLATION²

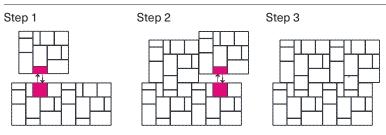

Clamp or Mechanical tool available for machine installation. Check with your local Techo-Bloc representative for more information.

NOTES

See page 6 for icons description.

See page 16 for more information about applications.

See page 26 to 28 for more technical information. When used in a permeable pavement application, see page 93 to 102 for more technical information.

*For this application, it is recommended that this product be installed on a concrete base as designed by a local Engineer.

JOINT WIDTH: %2" (7 mm)
% OF SURFACE OPENING: 4.5%**
INFILTRATION RATE: 570 in./hr (14 475 mm/hr)

**For permeable application, the installation should be combined with Blu 6×13 in a modular pattern. A min. of 4.5% opening surface requires 75% of Blu 6×13 and 25% of Blu.

***HD² Slate is only available in USA.